ROVER

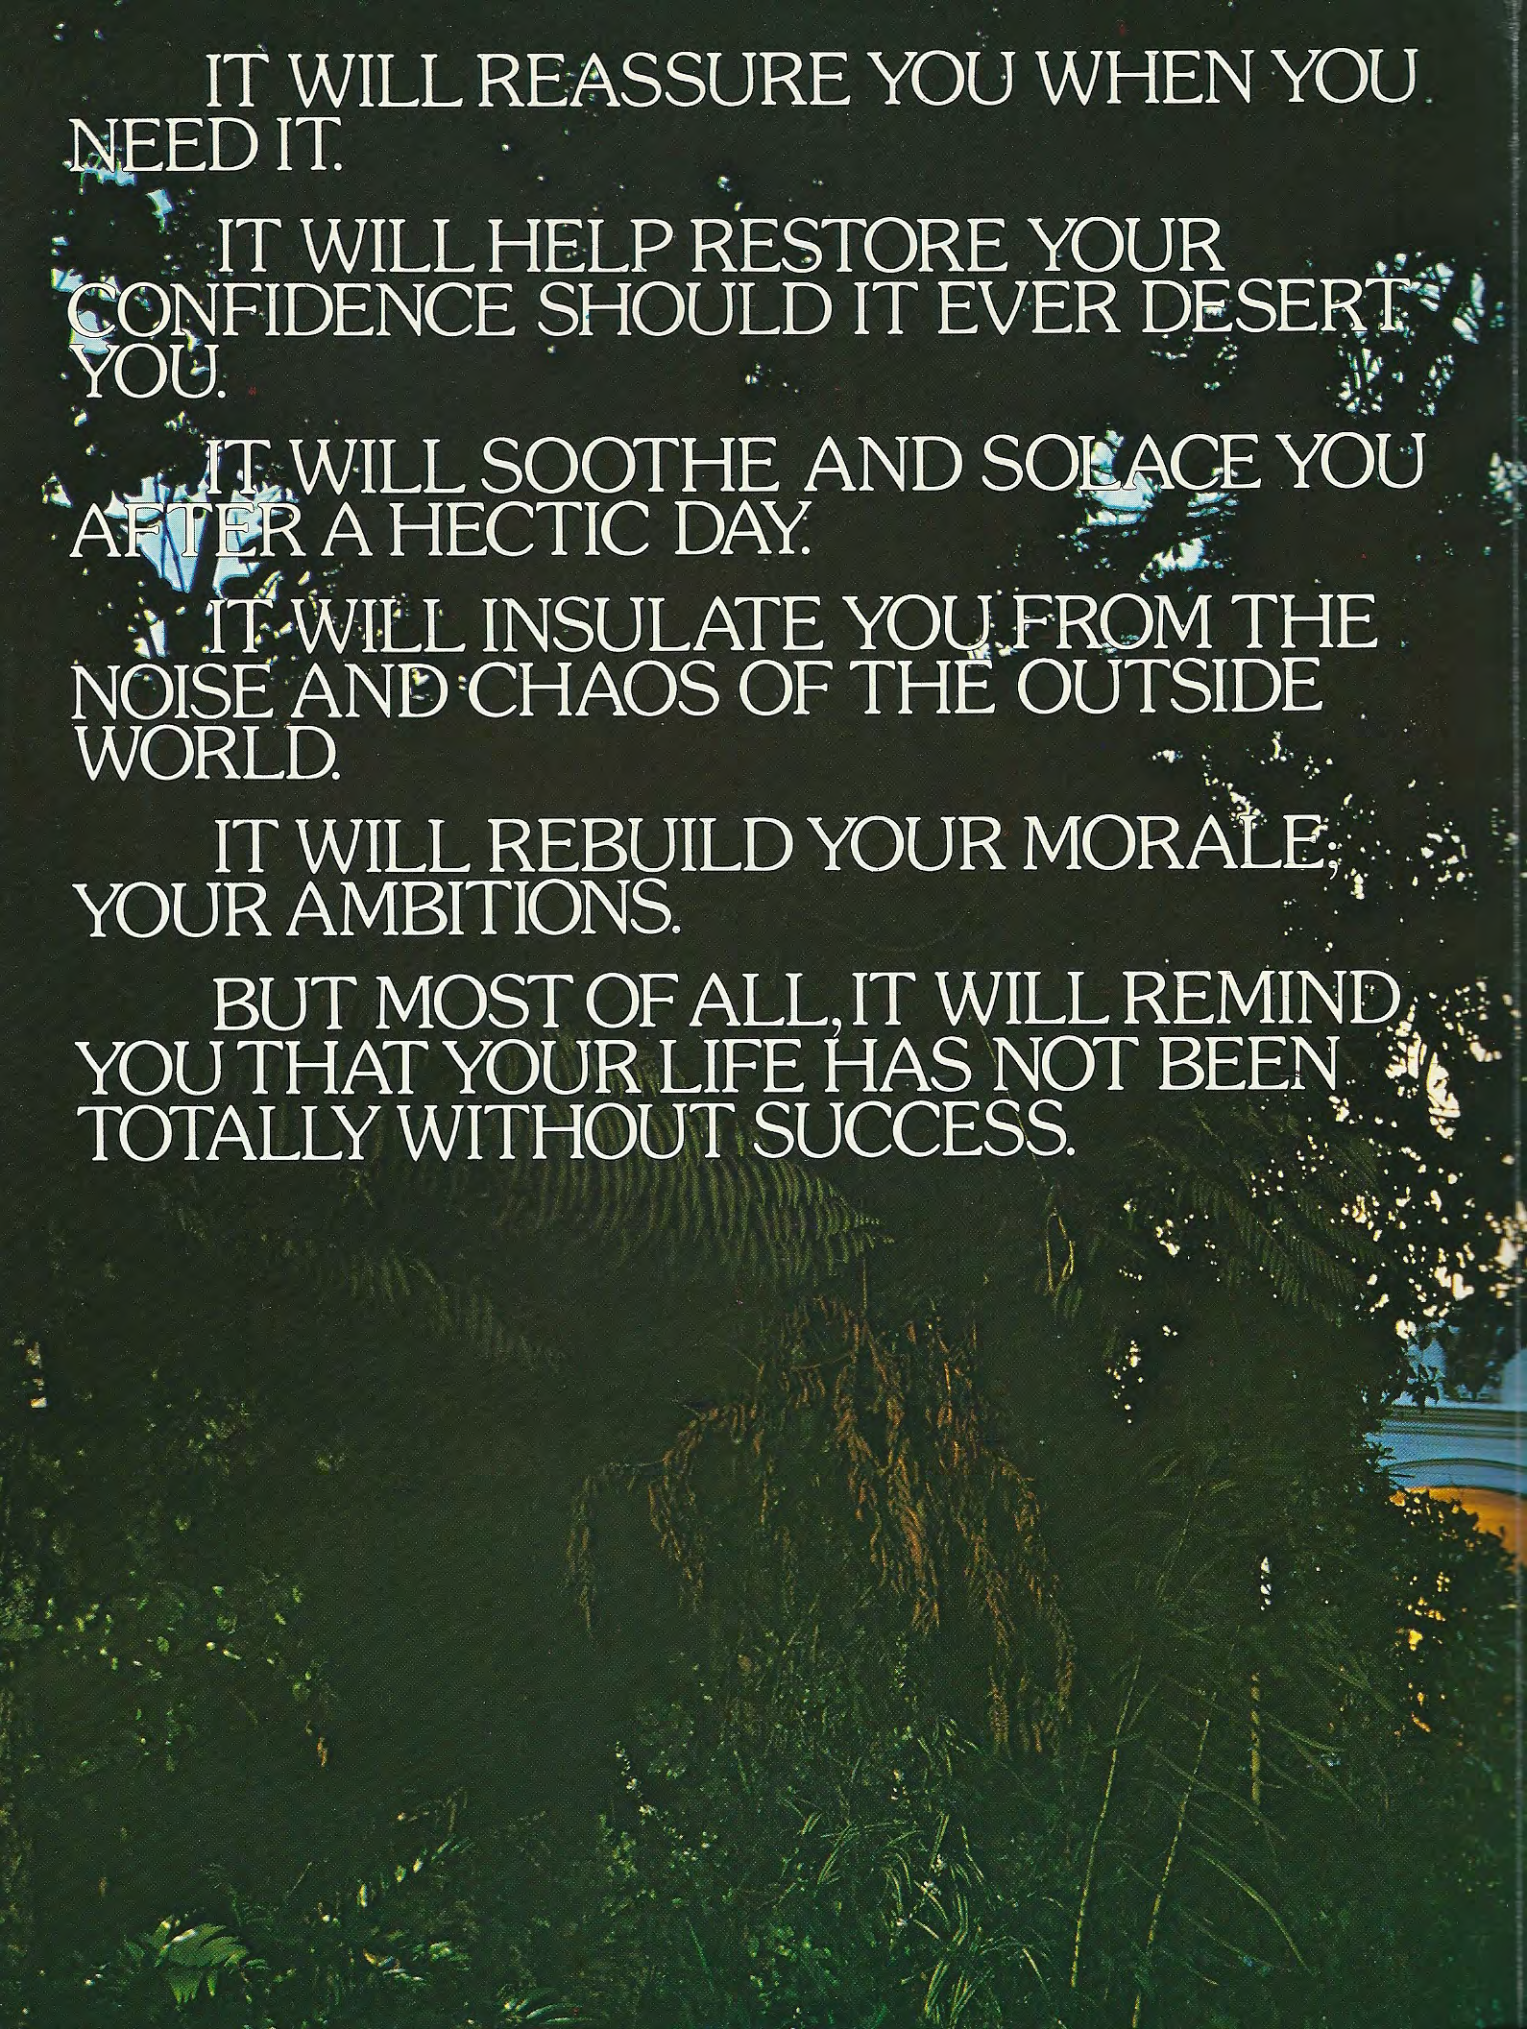

IT WILL REASSURE YOU WHEN YOU NEED IT.

IT WILL HELP RESTORE YOUR CONFIDENCE SHOULD IT EVER DESERT YOU.

IT WILL SOOTHE AND SOLACE YOU AFTER A HECTIC DAY.

IT WILL INSULATE YOU FROM THE NOISE AND CHAOS OF THE OUTSIDE WORLD.

IT WILL REBUILD YOUR MORALE, YOUR AMBITIONS.

BUT MOST OF ALL, IT WILL REMIND YOU THAT YOUR LIFE HAS NOT BEEN TOTALLY WITHOUT SUCCESS.

SPECIFICATIONS

DIMENSIONS

Wheelbase	2815 mm
Track — front	1500 mm
Track — rear	1500 mm
Ground clearance (fully laden)	155 mm
Length	4698 mm
Width	1768 mm
Height (unladen)	1354 mm
Boot height — max/min	387/330 mm
Boot depth — max/min	889 mm
Boot width	1473 mm
Seating width — front (per seat)	580 mm
Seating width — rear	1410 mm
Legroom — front — max/min	1143/991 mm
Legroom — rear — max/min	1181/1086 mm
Headroom — front	880 mm
Headroom — rear	880 mm

MAXIMUM TOWING MASS 1000 kg

(Applicable to all models unless specifically indicated)

ENGINE 3500

8 cylinder 90 deg "V" configuration. Bore 88.9 mm. Stroke 71.1 mm. Displacement 3528cm³. Power output (nett) 115.6 kW at 5250 r.p.m. Torque maximum (nett) 268.5N m at 2500 r.p.m. Compression ration 9.35:1. Number main bearings 5. Petrol tank capacity 67 litres on all models.

ENGINE 2600

6 cylinder in line. Bore 81 mm. Stroke 84 mm. Displacement 2597 cm³. Power output (nett) 101.4 kW at 5000 r.p.m. Max torque (nett) 206.1Nm at 3750 r.p.m. Compression ratio 9.25:1. 5 main bearings.

TRANSMISSION 3500 and 2600 AUTOMATIC

3 speed automatic with torque converter. Borg-Warner type 65. Ratios: Low 2.39, Intermediate 1.45, Top 1.00, Reverse 2.09. Rear axle 3.08. Transmission oil cooler in engine radiator. Capacity 7.0 litres.

TRANSMISSION 2600 5 SPEED MANUAL

5 speed all synchromesh gearbox. Ratios:1st 3.321, 2nd 2.087, 3rd 1.396, 4th 1.000, 5th 0.833, Reverse 3.428. Rear axle 3.08.

STEERING

Rack and pinion. Power assisted. Number of wheel turns lock to lock 2.75. Turning circle between kerbs 10.44 m. Steering wheel adjustable for rake and reach.

WHEELS AND TYRES

3500 — Rover alloy wheels. Fitted with 185 x 14 Radial Ply tyres.
2600 — Pressed steel disc wheels 6J x 14 retained by 5 wheel nuts. Fitted with 185 x 14 Radial Ply tyres.

BRAKES

Independent dual circuit hydraulic system — vacuum assisted. Front discs 250 mm diameter. Rear drums 228 mm diameter.

SUSPENSION

Front — Independent. Coil springs. MacPherson strut type telescopic damper units with anti-roll bar. Rear — Live rear axle, controlled by trailing arms, torque tube, and Watts linkage. Variable rate coil springs with self levelling units.

ELECTRICAL SYSTEM

12 Volt negative earth system.
Battery: 61 Ampere hours.
Ignition: Lucas Electronic.
Equipment: Twin horns. Two-speed wipers with intermittent wipe. Heated rear window. Bonnet light. Twin courtesy lights,automatic boot light, glove compartment lights and map lights. Halogen headlights. Front fog lights (3500). Front door open warning lights. Radio/cassette (3500). Radio (2600). Heater/demister/ventilator with three speed fan, ducting air to demist door windows and to heat rear compartment. Cigar lighter.

INSTRUMENTS

Speedometer incorporating total and trip odometers. Tachometer. Fuel gauge. Battery condition indicator. Water temperature gauge. Oil pressure gauge. Warning lights for ignition, oil pressure, choke, direction indicators (both operated for hazard warning), main beam, brake system failure 'on', handbrake 'on', low fuel level, heated rear window, rear seat belts, rear fog guard lamps, bulb failure and child locks 'on'. Control stalks on steering column for horns, headlamp flash and dip, direction indicators, windscreen wipers and washers and exterior lights. Switches on instrument panel to control front fog lamps (3500), rear fog lamps, hazard warning lights, heated rear window and panel lights. Clock.

COACHWORK

Five door, six-light, five seater saloon. Corrosion- resistant steel monocoque construction body. Forward hinged bonnet. One piece rear tailgate. Internally adjustable rear view mirror on driver's door. Chrome bumpers with wrap around rubber ends. Electric windows and centrepoint locking system (3500). Lap and diagonal inertia reel seat belts, front and rear, with a third lap belt at rear. Folding rear parcel shelf with interconnection to fifth door. Recessed sun visors. Front seats are fully reclining and are fitted with head restraints. Rear seats fold down.

UPHOLSTERY AND TRIM

Nutmeg interior trim with Coriander fabric. Carpeted throughout with 100% wool cut pile carpet.

USABLE BOOT CAPACITY

0.34 m³ seat up, 1.00 m³ seat down, and an additional 0.06 m³ with use of the boot-well.

Distributed by:

New Zealand Motor Corporation Limited LMVD

Outlets everywhere

Any alterations from the specifications on this page are a result of New Zealand Motor Corporation policy of continual model improvement and may occur at any time without notice.

Your Rover Dealer: